
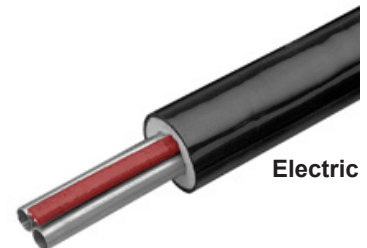


**Contact O'Brien for all your tubing requirements.**

- Bare Tubing
- PVC Jacketed Tubing – J-Line
- Polyurethane Jacketed Tubing – TPJ
- Weatherproof Insulated Tubing – S-Line
- Steam Heated Tubing – TPL / TPH
- Electric Heated Tubing – TPE
- Heated Analyzer Sample Tubing – TRACEPAK® / STACKPAK™

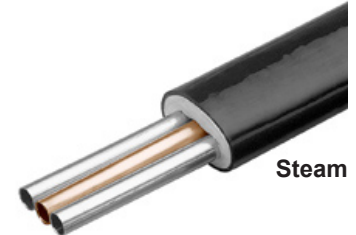

**Specifications**

**Size:** Fractional 1/8" – 1"OD  
Metric 3 – 25mm OD

**Materials:** 316/316L SS  
2.5% Molly 316/316L SS  
Welded 316/316L SS  
Alloy 825  
Duplex / Superduplex  
Copper  
Teflon®  
Other alloys and materials are available as well.

**Construction:** Seamless  
Welded  
20' / 6M Straight Sticks  
Continuous coils up to 2,500F/ 600M

**ID Surface:** Commercial Grade  
Smooth Bore (20Ra / 0.5µm)  
Thermocouple Clean per ASTM A632-S3  
CFOS per CGA G4.1 and ASTM G93  
TrueTube™ EP Electropolished (5Ra / 0.125 µm)  
TrueTube™ FS Coated Silcosteel® (SilcoNert™ 1000)  
TrueTube™ EPS Coated Siltek®/Sulfinert® (SilcoNert™ 2000)

**Standards:** All tubing conforms to ASTM, EN and DIN international standards.

© O'Brien Corporation • QLT-BULKSTUBING • 10 MAY 09



**O'Brien Corporation Offices**

**USA:** 1900 Crystal Industrial Ct. • St. Louis, MO 63114 • Ph: +1 (314) 236-2020 • Fax: +1 (314) 236-2080  
**BELGIUM:** Mallekotstraat 65 • B 2500 Lier Belgium • Ph: +32 (0)3 491 9875 • Fax: +32 (0)3 491 9876  
**CHINA:** Suite 1605A, 16F Feidiao International Building 1065 Zhao Jia Bang Road, Shanghai 200030  
Ph: +8621 51581635 • Fax: +8621 51581686

obcorp@obcorp.com • www.obcorp.com

Teflon is a registered trademark of E I du Pont de Nemours