
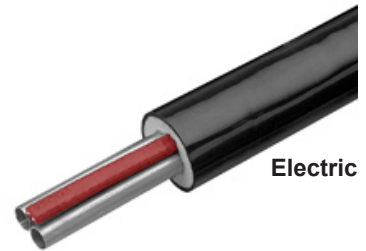
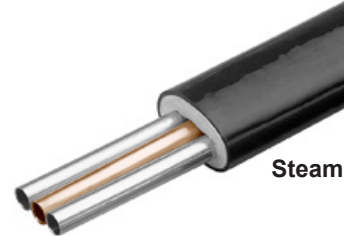


Contact O'Brien for all your tubing requirements.

- Bare Tubing
- PVC Jacketed Tubing – J-Line
- Polyurethane Jacketed Tubing – TPJ
- Weatherproof Insulated Tubing – S-Line
- Steam Heated Tubing – TPL / TPH
- Electric Heated Tubing – TPE
- Heated Analyzer Sample Tubing – TRACEPAK® / STACKPAK™



Specifications

Size: Fractional 1/8" – 1"OD
Metric 3 – 25mm OD

Materials: 316/316L SS
2.5% Molly 316/316L SS
Welded 316/316L SS
Alloy 825
Duplex / Superduplex
Copper
Teflon®
Other alloys and materials are available as well.

Construction: Seamless
Welded
20' / 6M Straight Sticks
Continuous coils up to 2,500F/ 600M

ID Surface: Commercial Grade
Smooth Bore (20Ra / 0.5µm)
Thermocouple Clean per ASTM A632-S3
CFOS per CGA G4.1 and ASTM G93
TrueTube™ EP Electropolished (5Ra / 0.125 µm)
TrueTube™ FS Coated Silcosteel® (SilcoNert™ 1000)
TrueTube™ EPS Coated Siltek®/Sulfinert® (SilcoNert™ 2000)

Standards: All tubing conforms to ASTM, EN and DIN international standards.

© O'Brien Corporation • QLT-BULKSTUBING • 10 MAY 09



O'Brien Corporation Offices

USA: 1900 Crystal Industrial Ct. • St. Louis, MO 63114 • Ph: +1 (314) 236-2020 • Fax: +1 (314) 236-2080

BELGIUM: Mallekotstraat 65 • B 2500 Lier Belgium • Ph: +32 (0)3 491 9875 • Fax: +32 (0)3 491 9876

CHINA: Suite 1605A, 16F Feidiao International Building 1065 Zhao Jia Bang Road, Shanghai 200030

Ph: +8621 51581635 • Fax: +8621 51581686

obcorp@obcorp.com • www.obcorp.com

Teflon is a registered trademark of E I du Pont de Nemours